



ICON MARUTI
INDUSTRIES

PAVING SOLUTIONS CATALOGUE 2026

Built with Strength. **Delivered with Trust.**



www.icontiles.in



+91 99662 97476 • +91 98484 11334



Jupudi Donka Road, Ibrahimpatnam, Vijayawada, Andhra Pradesh 521456



ICON MARUTI INDUSTRIES

OUR PRODUCT RANGE

02

CATALOGUE 2026

01

PARKING TILES

23 mm · Pedestrian & light vehicle

23 mm

- VLG
- Drops
- Mushroom
- Sunflower
- ERC Brick Pattern
- Magic
- PTR
- VTR
- Ramp Tactile

02

HEAVY-DUTY PAVERS

60 & 80 mm

- Flexi Paver 60 mm
- Hill Rock Heavy Duty Paver 60 mm
- Cobble Stones Paver 60 mm
- Diamond Paver 60 mm
- Hexagon Shaped Paver 60 mm
- Mushroom Pavers 60 mm
- B-RIM Pavers 60 / 80 mm
- I Pavers 60 / 80 mm
- V-Type Heavy Duty Paver 80 mm

03

MANHOLE COVERS

- Manhole Cover — Square
- Manhole Cover — Circular

04

KERB STONES & SAUCER DRAINS

- Kerb Stone — 100 / 110 mm
- Z-Type Kerb Stone — M25
- Saucer Drain Mould — 75 / 100 mm

PTR PARKING TILE

PARKING TILE / 23 MM

PRODUCT



Recessed grid, disciplined field.

The PTR tile carries a recessed brick-grid emboss that reads as a crisp, ordered field when laid. Pigment-through M20 concrete keeps the pattern sharp underfoot for parking bays, courtyards, and compound floors.

Applications:

Parking Areas • Walkways • Courtyards •
Compound Floors • Public Spaces

Technical Specifications:

THICKNESS	23 mm
SIZE	300 × 300 mm
MATERIAL	High Strength Concrete
FINISH	Recessed grid emboss / Anti-Skid
LOAD BEARING	M20 — pedestrian & light vehicle

LAI D PATTERN



Available Colours:



Terracotta • Yellow • Saffron Red • Silver Grey • Dark Grey • Nut Brown • Black



ICON MARUTI
INDUSTRIES


PAVING SOLUTIONS. BUILT TO LAST.

23 MM · M20
MAGIC TILE

PRODUCT



LAI D PATTERN

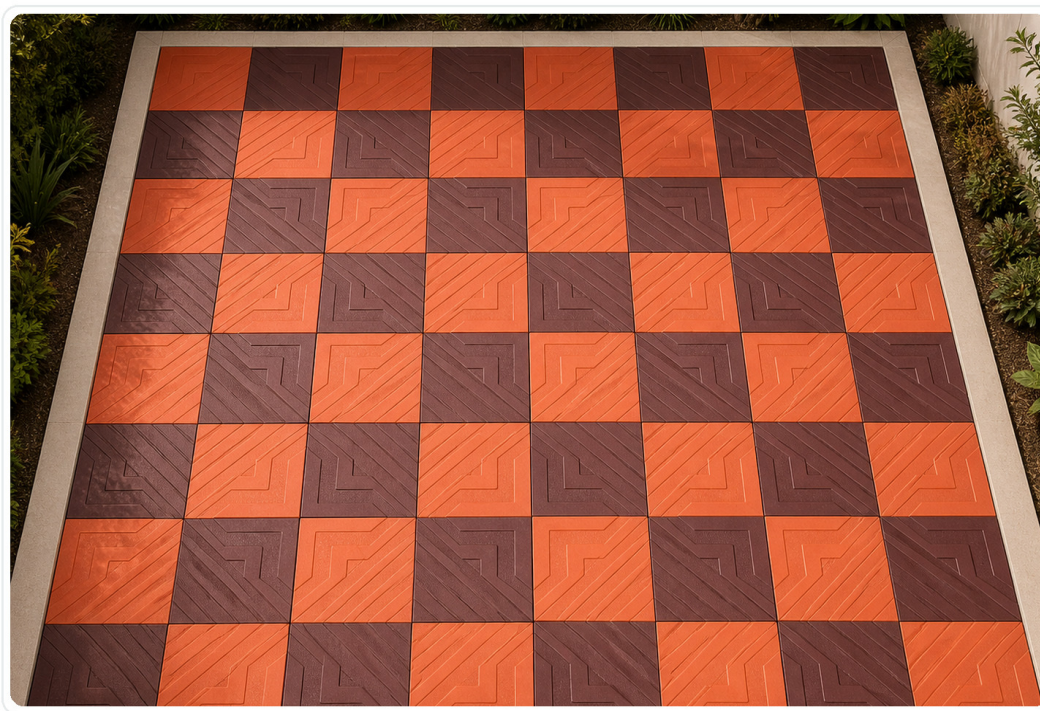

GEOMETRIC RHYTHM. WARM CONTRAST.

A precision-cast module with a bold stepped-line surface. Repeating quarter-turn orientations create continuous geometric movement, while the textured concrete finish provides dependable grip.

APPLICATIONS

Parking Areas • Walkways • Courtyards • Public Spaces

AVAILABLE COLOURS



*Colors shown are for reference only. Actual colors may vary slightly.

TECHNICAL SPECIFICATIONS

THICKNESS	23 mm
SIZE	300 × 300 mm
MATERIAL	High Strength Concrete
FINISH	Textured / Anti-Skid
GRADE	M20



**ICON MARUTI
INDUSTRIES**
PAVING SOLUTIONS. BUILT TO LAST.

SUNFLOWER TILE

SUNFLOWER TILE

23 mm THICKNESS

PRODUCT



LAI D PATTERN



One petal module. Endless composition.

A sculpted botanical paving system designed for continuous decorative fields. Its repeating flower centres create a refined rhythm across villa entrances, courtyards, garden paths and outdoor spaces.

TECHNICAL SPECIFICATIONS

Thickness	23 mm
Grade	M20
Material	Pigment-through cement concrete
Finish	Sculpted petal relief
Load bearing	Pedestrian & light vehicle

APPLICATIONS

Garden Pathways • Courtyards • Villa Entrances • Parks •
Decorative Outdoor Spaces

AVAILABLE COLOURS



*Colors shown are for reference only. Actual colors may vary slightly.



**ICON MARUTI
INDUSTRIES**

PAVING SOLUTIONS. BUILT TO LAST.


VLG PARKING TILE

PARKING TILE / 23 MM

Clean geometry, honest surface.

A precision-cast 300 mm square tile with a fine textured finish. Balanced colour pigments carry through the tile body, so scuffs and wear never expose a raw grey base.

PRODUCT

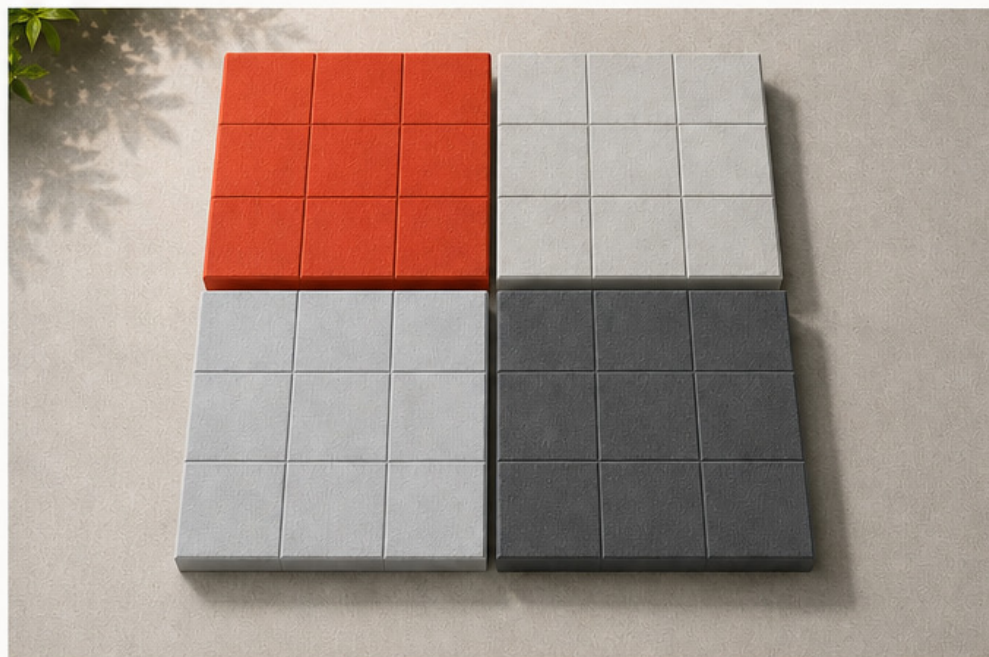

TECHNICAL SPECIFICATIONS

THICKNESS	23 mm
SIZE	300 × 300 mm
MATERIAL	High Strength Concrete
FINISH	Textured / Anti-Skid
LOAD BEARING	M20 — pedestrian & light vehicle


APPLICATIONS

Parking Areas • Walkways •
Residential Driveways • Commercial Spaces

AVAILABLE COLOURS

Terracotta • Yellow • Saffron Red • Silver Grey •
Dark Grey • Nut Brown • Black

LAI D PATTERN

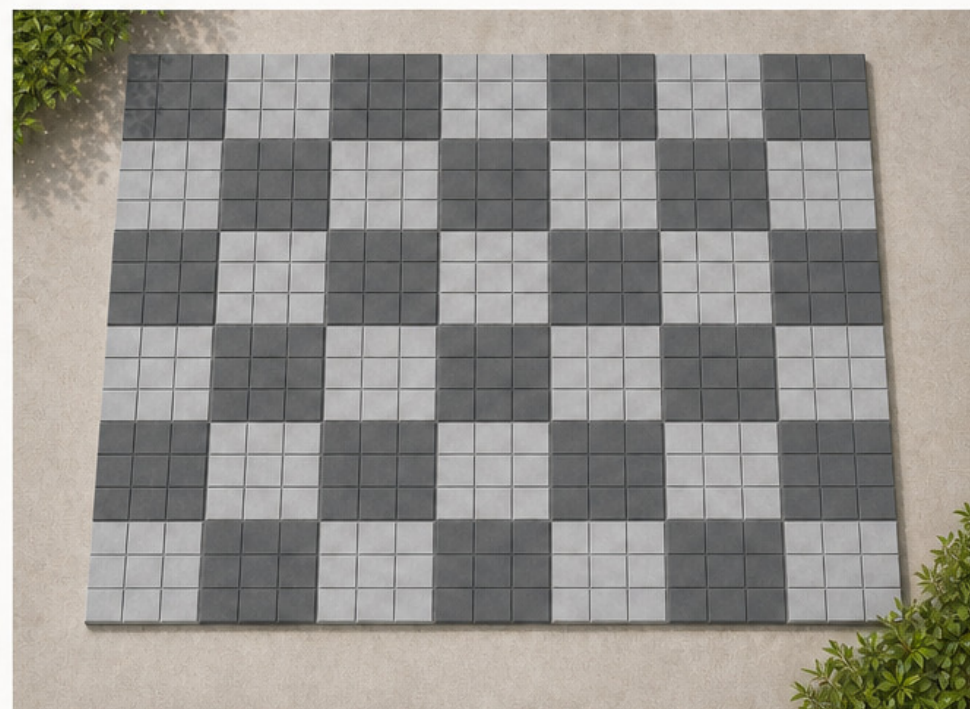



**ICON MARUTI
INDUSTRIES**
PAVING SOLUTIONS. BUILT TO LAST.

MUSHROOM PARKING TILE

PARKING TILE

23 mm THICKNESS

PRODUCT




Sculpted surface with honest texture.

Cast from studio-cut molds, the pebble-relief top brings craft detail to compound floors and villa entrances. Reads calm from a distance, tactile up close.

TECHNICAL SPECIFICATIONS

Thickness	23 mm
Size	300 × 300 mm
Material	High Strength Concrete
Finish	Textured / Anti-Skid
Load bearing	M20 grade — pedestrian

LAI D PATTERN

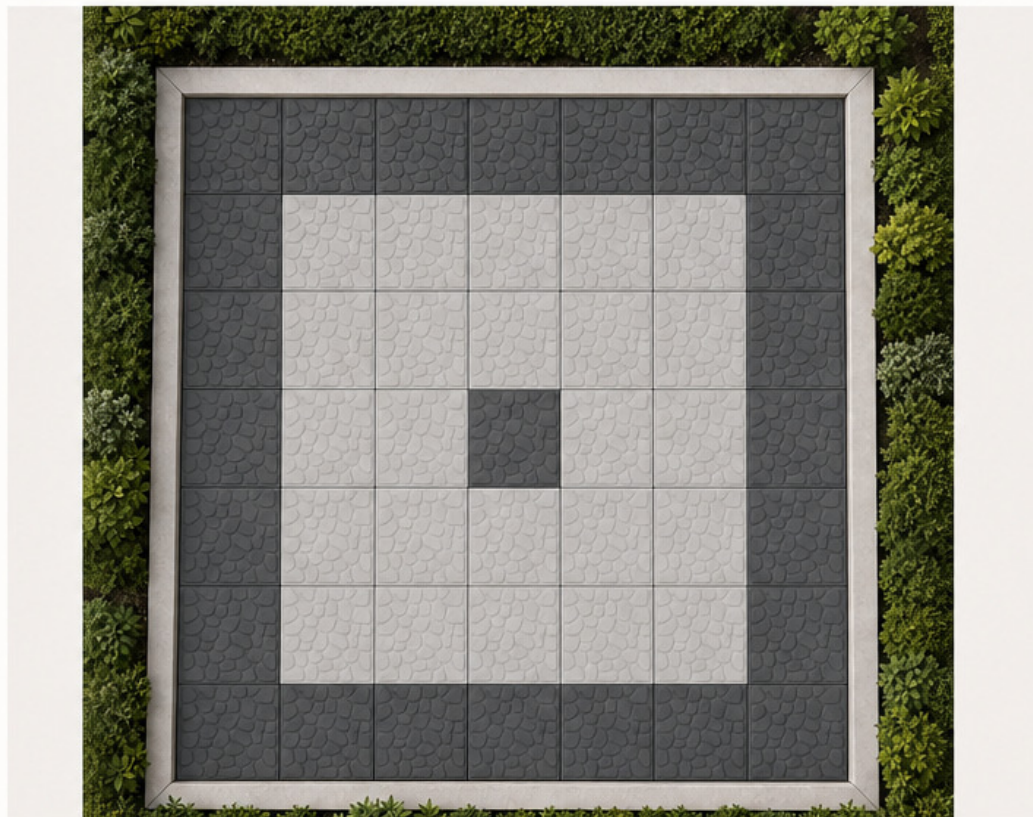

APPLICATIONS

Ramps • Walkways •
Parking Areas • Public Spaces

AVAILABLE COLOURS



*Colours shown are for reference only. Actual colours may vary slightly.



**ICON MARUTI
INDUSTRIES**
PAVING SOLUTIONS. BUILT TO LAST.

ERC BRICK PATTERN TILE


ERC PARKING TILE

23 mm THICKNESS

PRODUCT



LAI D PATTERN

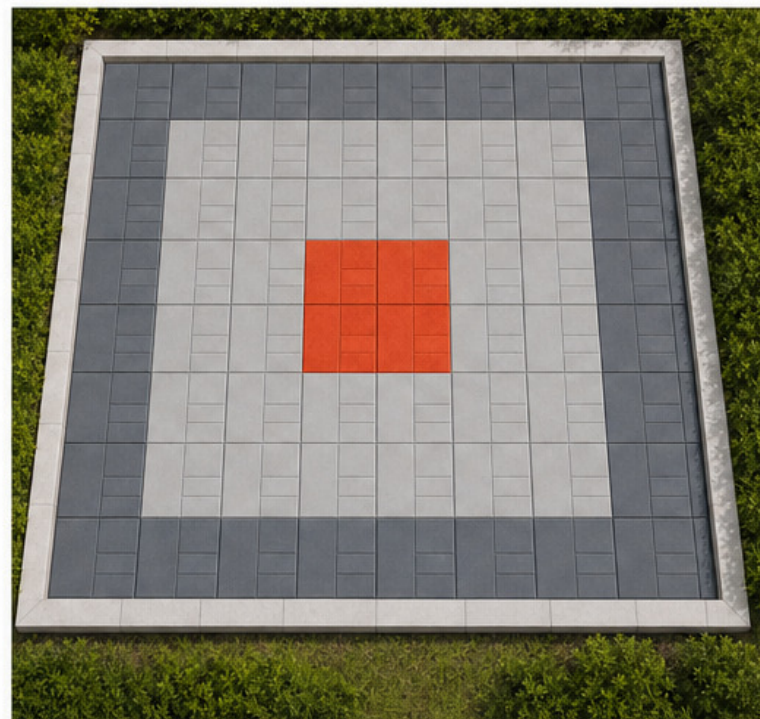

Classic modular character, cast as one tile.

Six-brick modular face creates a warm, hand-laid appearance while installing as a single fast-to-lay tile. Its fine brick emboss and pigment-through concrete provide a clean, durable finish for everyday paved spaces.

TECHNICAL SPECIFICATIONS

Thickness	23 mm
Size	300 × 300 mm (2 × 3 module)
Material	High Strength Concrete
Finish	Fine brick emboss
Load bearing	M20 grade — pedestrian & light vehicle

APPLICATIONS

Footpaths • Compound Floors • Landscape Paving

AVAILABLE COLOURS



*Colours shown are for reference only. Actual colour may vary slightly.



**ICON MARUTI
INDUSTRIES**

PAVING SOLUTIONS. BUILT TO LAST.


VTR PARKING TILE

PARKING TILE / 23 MM

Tactile stud warning, cast in concrete.

The VTR tile features a full grid of truncated dome studs formed integral to the tile body — no glued caps to shear off. Pigment-through bodies deliver high-contrast, long-lasting warning surfaces at platform edges, crossings, and accessible entryways.

PRODUCT

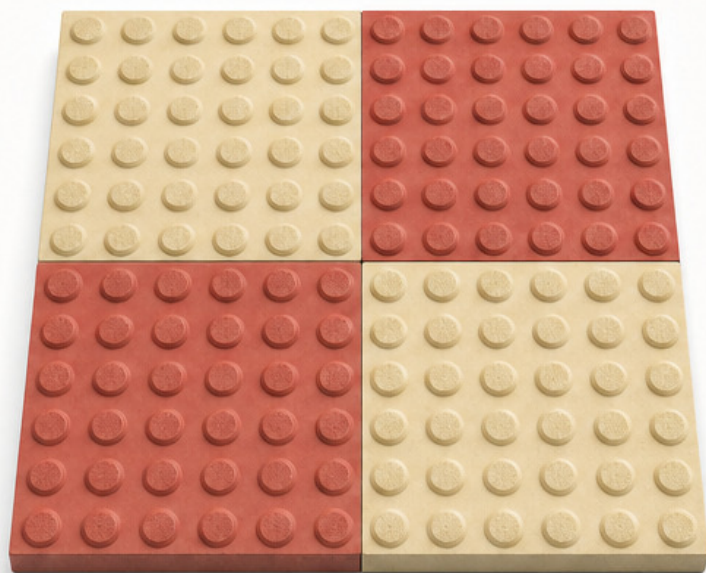

TECHNICAL SPECIFICATIONS

THICKNESS	23 mm
SIZE	300 × 300 mm
MATERIAL	High Strength Concrete
FINISH	Truncated dome studs / Anti-Skid
LOAD BEARING	M20 grade — pedestrian


APPLICATIONS

Platform Edges • Pedestrian Crossings •
Ramp Landings • Accessible Entryways •
Public Walkways

AVAILABLE COLOURS

Terracotta • Yellow • Saffron Red • Silver Grey •
Dark Grey • Nut Brown • Black

LAID PATTERN

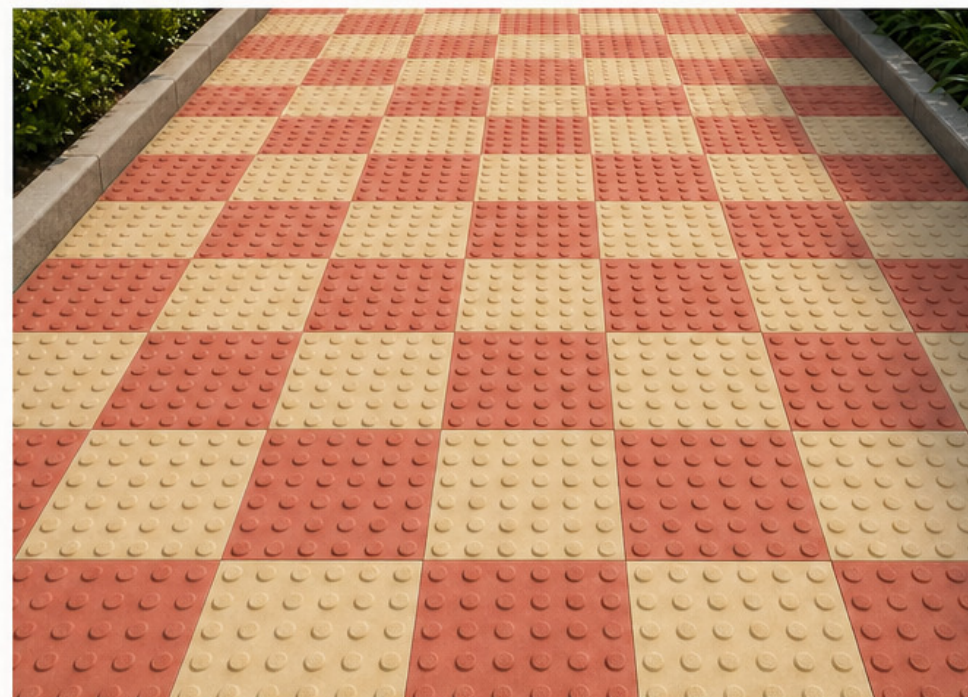




**ICON MARUTI
INDUSTRIES**
PAVING SOLUTIONS. BUILT TO LAST.

DROP PARKING TILE

DROP TILE

23 mm THICKNESS

PRODUCT

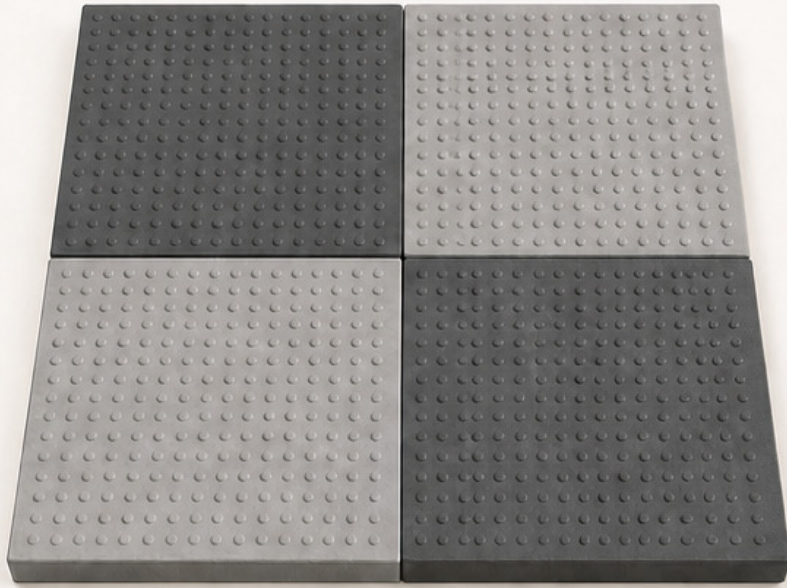

LAI D PATTERN



Stop-and-attend warning, cast in concrete.

Grid of truncated dome studs provides an unmistakable tactile warning at platform edges and crossings. Studs are formed integral to the tile — no glued caps to shear off.

TECHNICAL SPECIFICATIONS

Thickness	23 mm
Size	300 × 300 mm
Material	High Strength Concrete
Finish	Textured / Anti-Skid
Load bearing	M20 grade — pedestrian

APPLICATIONS

Platform Edges • Pedestrian Crossings •
Ramp Landings • Accessible Entryways

AVAILABLE COLOURS



*Colours shown are for reference only. Actual colours may vary slightly.



ICON MARUTI


INDUSTRIES

PAVING SOLUTIONS. BUILT TO LAST.

PARKING TILE / 25 MM

RAMP PARKING TILE

PRODUCT

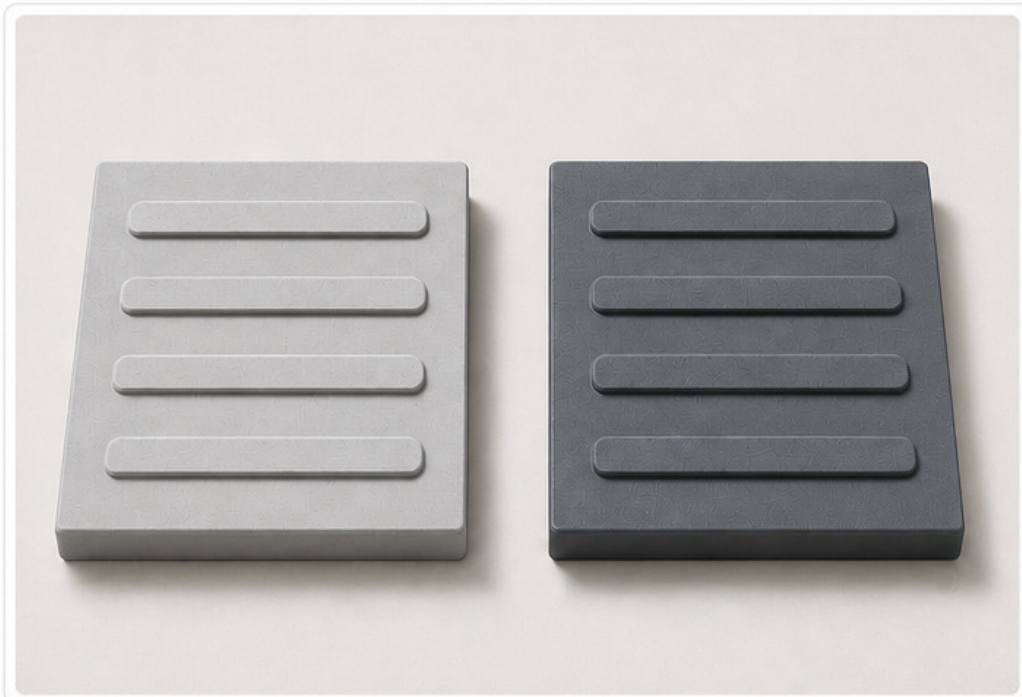

LAID PATTERN



SAFE GRIP. CLEAN DIRECTION.

A precision-cast parking tile engineered for ramps and access areas. Four raised anti-slip bars provide dependable traction while the textured concrete surface supports safe movement in wet and dry conditions.

APPLICATIONS

Ramps • Walkways • Parking Areas • Public Spaces

AVAILABLE COLOURS



*Colors shown are for reference only. Actual colors may vary slightly.

TECHNICAL SPECIFICATIONS

THICKNESS	25 mm
SIZE	300 × 300 mm
MATERIAL	High Strength Concrete
FINISH	Textured / Anti-Skid
GRADE	M20



**ICON MARUTI
INDUSTRIES**

PAVING SOLUTIONS. BUILT TO LAST.

PRODUCT



60 mm thick for superior strength and durability.

60mm thick diamond-form paver ideal for car and light commercial traffic. Textured surface for better grip and safety, with a premium finish suitable for driveways, parking areas, and commercial landscapes.



Terracotta

Yellow

Saffron Red

Silver Grey

Dark Grey

Nut Brown

Black

DIAMOND PAVER

HEAVY DUTY PAVER / 60 MM

LAI D PATTERN



TECHNICAL SPECIFICATIONS

THICKNESS	60 mm
MATERIAL	High Strength Concrete
FINISH	Textured / Anti-Skid
LOAD BEARING	M30 grade — Car & light commercial

APPLICATIONS

Parking Areas • Walkways • Driveways • Public Spaces • Industrial Floors

AVAILABLE COLOURS

Terracotta • Yellow • Saffron Red • Silver Grey • Dark Grey • Nut Brown • Black

HEXAGON SHAPED PAVER

HEXAGON PAVER 60 mm THICKNESS

Six sides, engineered for vehicular loads.

Embossed hexagon-shaped pavers that tessellate into fields, borders, and accent medallions.

The 60 mm M30 body handles light vehicular traffic while the geometry does the layout for you.


TECHNICAL SPECIFICATIONS

Thickness	60 mm
Material	Pigment-through M30 cement concrete
Finish	Embossed hexagonal motif
Load bearing	M30 grade — car & light commercial


APPLICATIONS

Driveways • Parking Areas • Garden Paths •
Courtyards • Commercial Landscapes

PRODUCT

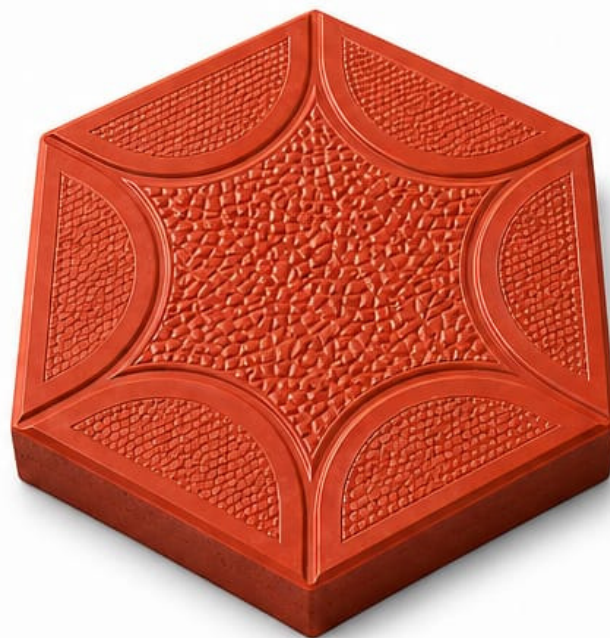

LAI D PATTERN

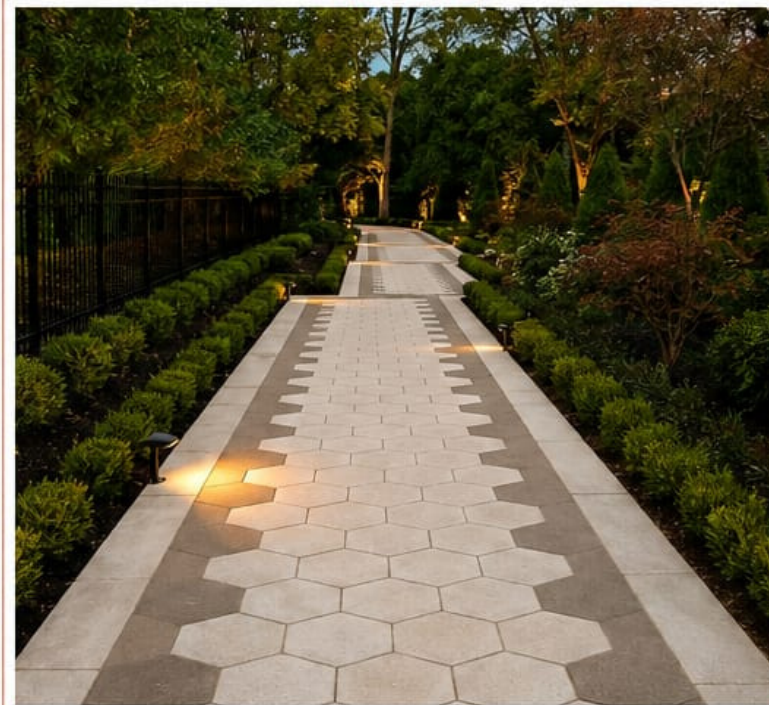

AVAILABLE COLOURS



Terracotta



Yellow



Saffron Red



Silver Grey



Dark Grey



Nut Brown



Black

**Colours shown are for reference only. Actual colours may vary slightly.*



**ICON MARUTI
INDUSTRIES**
PAVING SOLUTIONS. BUILT TO LAST.

I-SHAPE PAVER

I-SHAPE PAVER

60 mm / 80 mm THICKNESS

PRODUCT



LAID PATTERN



High-strength performance, cast in concrete.

Precision interlocking I-profile delivers stable alignment and dependable load distribution. Vibro-pressed M30 and M40 concrete supports applications from car traffic to heavy-duty use.

TECHNICAL SPECIFICATIONS

Thickness	60 mm / 80 mm
Grade	M30 (60 mm) / M40 (80 mm)
Material	High Strength Concrete
Finish	Textured / Anti-Skid
Load bearing	60 mm M30 — car & light commercial 80 mm M40 — heavy duty

APPLICATIONS

Parking Areas • Industrial Floors • Walkways • Driveways • Commercial Spaces

AVAILABLE COLOURS



*Colors shown are for reference only. Actual colors may vary slightly.



**ICON MARUTI
INDUSTRIES**

PAVING SOLUTIONS. BUILT TO LAST.

B-RIM PAVERS

B-RIM PAVERS

60 / 80 mm

PRODUCT



APPLICATION



The workhorse of urban paving.

High-strength interlocking pavers in two variants: 60 mm M30 for cars and light commercial areas, and 80 mm M40 for heavy-duty industrial and commercial traffic.

TECHNICAL SPECIFICATIONS

Thickness	60 / 80 mm
Material	High Strength Concrete (M30 / M40)
Finish	Textured / Anti-Skid
Load bearing	M30 (60 mm) — car & light commercial • M40 (80 mm) — heavy duty

APPLICATIONS

Parking Areas • Driveways • Walkways • Commercial Spaces
• Industrial Floors • Public Spaces



**ICON MARUTI
INDUSTRIES**

PAVING SOLUTIONS. BUILT TO LAST.

HILL ROCK HEAVY DUTY PAVER

HILL ROCK PAVER

60 mm THICKNESS

PRODUCT



LAI D PATTERN



Natural rock finish, engineered strength.

High-strength paver with a natural rock finish, designed to deliver superior performance under heavy load conditions. Ideal for industrial and commercial spaces that demand durability, strength and style.


TECHNICAL SPECIFICATIONS

Thickness	60 mm
Size	As Per Requirement
Material	High Strength Concrete
Finish	Textured / Anti-Skid
Load bearing	M30 grade — industrial

APPLICATIONS

Parking Areas • Industrial Floors • Walkways • Driveways • Commercial Spaces

AVAILABLE COLOURS



*Colours shown are for reference only. Actual colours may vary slightly.

www.icontiles.in

COBBLE STONES

T ROCK PAVER

60 mm THICKNESS

PRODUCT



LAI D PATTERN



Rock texture. Heavy-duty strength.

T Rock cobblestones combine a natural split-stone appearance with a compact modular format. The textured surface creates a durable, refined paving field for inclined driveways, villa entrances and outdoor vehicle areas.

TECHNICAL SPECIFICATIONS

Thickness	60 mm
Type	T-Rock
Material	High Strength Concrete
Finish	Textured / Anti-Skid
Grade	M30
Load bearing	Car & light commercial vehicles

APPLICATIONS

Parking Areas • Industrial Floors • Walkways • Driveways • Commercial Spaces

AVAILABLE COLOURS



*Colors shown are for reference only. Actual colors may vary slightly.



ICON MARUTI


INDUSTRIES

PAVING SOLUTIONS. BUILT TO LAST.

60 mm THICKNESS

FLEXI PAVER

PRODUCT

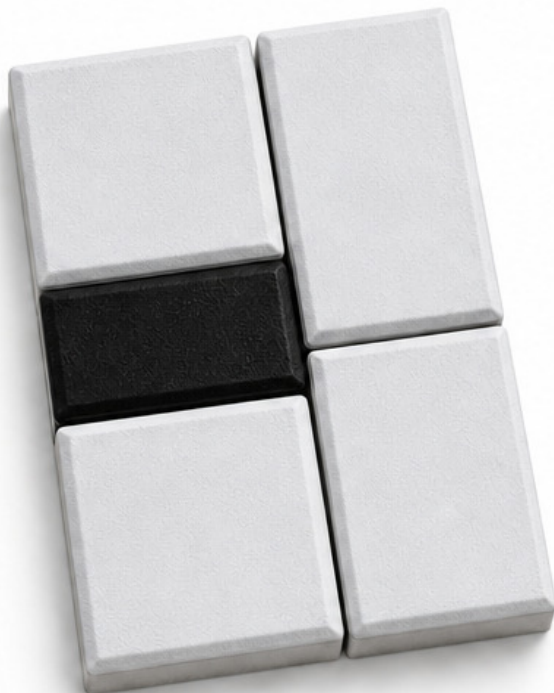

MODULAR RHYTHM. PRECISELY CAST.

A five-piece modular paver with a refined leather-grain surface. Separate precision-cast pieces create flexible layouts, while recessed joints and bevelled edges add depth, grip and a clean architectural finish.


APPLICATIONS

Driveways • Walkways • Courtyards • Landscaped Paths

LAI D PATTERN



JOINT & EDGE DETAIL

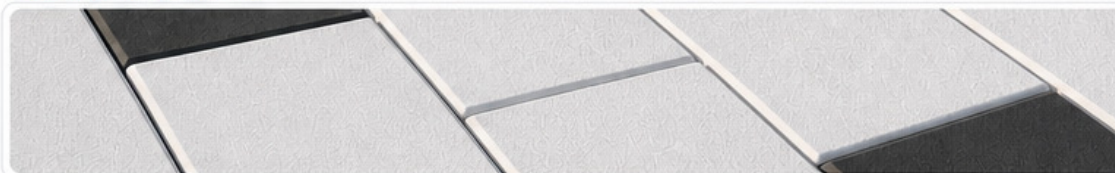

AVAILABLE COLOURS



TERRACOTTA

YELLOW

SAFFRON RED

SILVER GREY

DARK GREY

NUT BROWN

BLACK

TECHNICAL SPECIFICATIONS

THICKNESS	60 mm
MATERIAL	High Strength Concrete
FINISH	Leather-Grain Textured / Anti-Skid

MUSHROOM PAVERS

MUSHROOM PAVER

60 mm THICKNESS

PRODUCT



LAI D PATTERN



Heavy-duty pebble relief in warm earth tones.

The 60mm Mushroom Paver brings a tactile pebble-embossed surface with pigment-through color. Its added thickness handles light vehicular loads while the sculpted texture keeps footing sure across driveways, courtyards, and garden paths.

*Colors shown are for reference only. Actual colors may vary slightly.


TECHNICAL SPECIFICATIONS

Thickness	60 mm
Material	High Strength Concrete
Finish	Embossed pebble relief / Anti-Skid
Load bearing	M30 grade — car & light commercial

APPLICATIONS

Driveways • Parking Areas • Garden Pathways • Courtyards • Public Walkways

AVAILABLE COLOURS





**ICON MARUTI
INDUSTRIES**
PAVING SOLUTIONS. BUILT TO LAST.

V-TYPE HEAVY DUTY PAVER

V-TYPE PAVER

80 mm THICKNESS

PRODUCT



LAI D PATTERN



Locked laterally. Built for heavy duty.

80 mm M40 zig-zag paver — every interlock resists shear in two axes, holding formation under repeated heavy turning loads.


TECHNICAL SPECIFICATIONS

Thickness	80 mm
Material	High Strength Concrete (M40)
Finish	Textured top / Anti-Skid
Load bearing	M40 grade — heavy duty

APPLICATIONS

Industrial Floors • Commercial Yards • Campus Roads • Parking Areas • Public Plazas

AVAILABLE COLOURS



*Colors shown are for reference only. Actual colors may vary slightly.



**ICON MARUTI
INDUSTRIES**

PAVING SOLUTIONS. BUILT TO LAST.

KERB STONE

KERB STONE

100 / 110 mm

PRODUCT



APPLICATION



Precast edging that holds the line.

Precast M25 kerb stones with a clean chamfered profile, engineered for road edging, parking boundaries and landscape borders. Vibro-cast construction provides consistent geometry, durable alignment and long service life.

TECHNICAL SPECIFICATIONS

Thickness	100 / 110 mm
Size	450 × 400 × 110 mm 600 × 375 × 100 mm 600 × 300 × 100 mm
Material	High Strength Concrete
Finish	Smooth chamfered edge
Load bearing	M25 grade — road edging & channelization

APPLICATIONS

Road Edges • Median Dividers • Parking Boundaries • Landscape Borders

*Colours shown are for reference only. Actual colours may vary slightly.



**ICON MARUTI
INDUSTRIES**


PAVING SOLUTIONS. BUILT TO LAST.

Z-TYPE KERB STONE

Z-TYPE KERB STONE

M25

PRODUCT

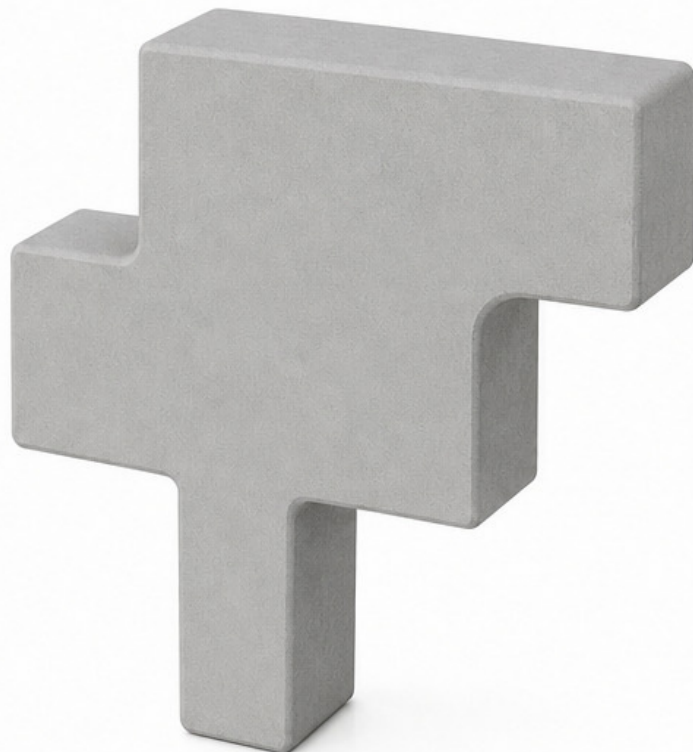

APPLICATION



Interlocking Z-profile for continuous alignment.

The Z-profile of every unit interlocks with the next, holding alignment under vehicle impact and thermal movement. M25 concrete is precision-cast for tight joints and a continuous kerb line.

TECHNICAL SPECIFICATIONS

Size	Interlocking Z-profile module
Material	High Strength Concrete
Finish	Smooth chamfered edge
Load bearing	M25 grade — interlocking road edge

APPLICATIONS

Road Edges • Highway Medians • Parking Boundaries • Channelized Junctions



**ICON MARUTI
INDUSTRIES**


PAVING SOLUTIONS. BUILT TO LAST.

SAUCER DRAIN MOULDS

75 mm + 100 mm

DRAINAGE MOULDS

PRODUCT

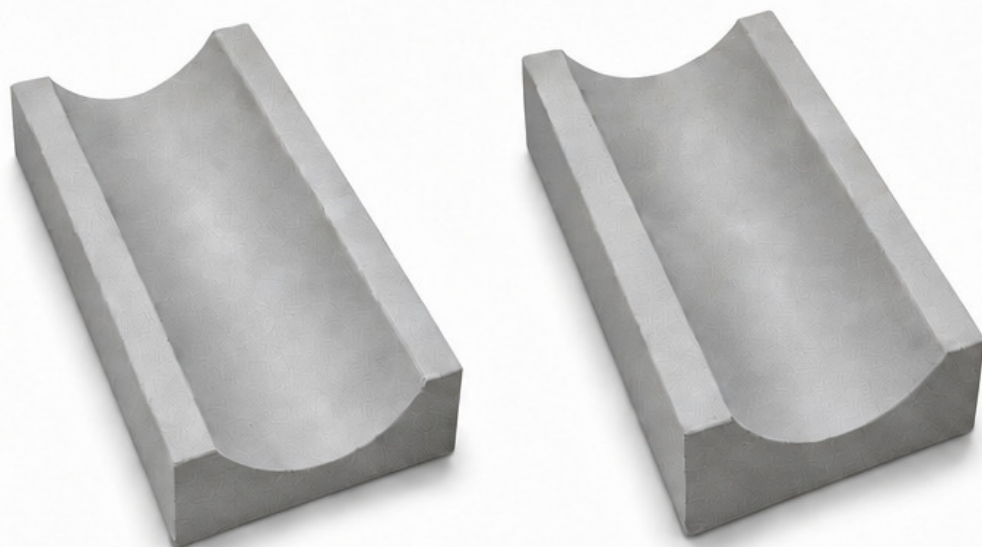

75 mm

100 mm

APPLICATION VIEW



Two depths. One continuous drainage line.

Precast concrete saucer drains form a smooth concave channel for directing surface runoff. Two variants suit paved and landscaped areas.

TECHNICAL SPECIFICATIONS

Thickness	75 / 100 mm
Size	600 × 300 × 75 mm • 600 × 300 × 100 mm
Material	High Strength Concrete
Finish	Smooth concave channel
Load bearing	Surface drainage — pedestrian & light vehicle

APPLICATIONS

Compound Drainage • Roadside Runoff • Campus Landscaping • Parking Runoff

*Colours shown are for reference only. Actual colours may vary slightly.



**ICON MARUTI
INDUSTRIES**

PAVING SOLUTIONS. BUILT TO LAST.

MANHOLE COVER – CIRCULAR

CIRCULAR COVER

AS PER REQUIREMENT

PRODUCT



FRAME & COVER DETAIL



Circular covers that seat cleanly, every time.

The self-centering circular profile cannot fall through its frame. Precision-cast RCC construction, a non-skid textured top and a clean seating fit support reliable utility, drainage and municipal access.

TECHNICAL SPECIFICATIONS

Thickness	As per requirement
Size	Standard circular diameters
Material	High Strength Concrete (RCC)
Finish	Non-skid textured top
Load bearing	Custom load class — quote on request

APPLICATIONS

Utility Chambers • Drainage Access • Water Meter Pits • Municipal Infrastructure

*Colors shown are for reference only. Actual colors may vary slightly.



**ICON MARUTI
INDUSTRIES**

PAVING SOLUTIONS. BUILT TO LAST.

PAVING SOLUTIONS CATALOGUE 2026

**STRONG
FOUNDATIONS.
LASTING
RELATIONSHIPS.**

PAVING SOLUTIONS CATALOGUE

2026

WITH GRATITUDE

THANK YOU

We appreciate your trust in Icon Maruti Industries.

We look forward to providing dependable paving solutions built for strength, durability and lasting value.

FACTORY & CONTACT



FACTORY ADDRESS

Jupudi Donka Road, Ibrahimpatnam
Vijayawada, Andhra Pradesh



CALL US

+91 99662 97476
+91 98484 11334



WEBSITE

www.icontiles.in

BUILT TO LAST